



TAURULIFT T 133H



www.ausa.com

AUSA Center, S.L. ● Ctra. de Vic, Km 2.8 - P.O.B. 194, 08243 Manresa - BARCELONA (ESPAÑA) Tel.: +34 93 874 73 11 E-mail: ausa@ausa.com



ISO 9001 ISO 14001



AUSA Madrid ● Pol. Ind. Coslada-Marconi 15-17, 28823 Coslada - MADRID (ESPAÑA) Tel.: +34 91 669 00 06 E-mail: ausa.madrid@ausa.com

AUSA France ● Z. I. Saint Charles-Rue de Zürich, 66000 PERPIGNAN (FRANCE) Tel.: +33 (0) 4 68 54 38 97 E-mail: ausa.france@ausa.com

AUSA Verkauf & Service Deutschland ● Heinrich-Welken Str. 5, 59069 HAMM - RHYERN (GERMANY) Tel.: +49 (0) 2385-9359362 E-mail: ausa.deutschland@ausa.com

BEIJING Rep. office ● Address Room 527, HengXiang Building, Tuanjiehu Nanli, Chaoyang District. - Beijing 100026 CHINA

Tel: 86-10-8597 1983 - Fax: 86-10-8597 1993 - E-mail: ausa.china@ausa.com

AUSA UK ● Sales: 07970639988 E-mail: ausa.uk@ausa.com

AUSA Northamerica Corp. ● E-mail: ausa.corp@ausa.com


(Sede central AUSA-Manresa)

T 133 H

AUSA

www.ausa.com

| DIMENSIONS (mm) | T 133 H | T 133 H x4 |
|-----------------|---------|------------|
| A | 1924 | 1942 |
| B | 263 | 270 |
| C | 1347 | 1410 |
| D | 2919 | 2982 |
| E | 485 | 485 |
| F | 1723 | 1723 |
| G | 383 | 383 |
| H | 143 | 123 |
| I | 1000 | 1000 |
| J | 3591 | 3591 |
| K | 310 | 310 |
| L | 2644 | 2644 |
| M | 748 | 748 |

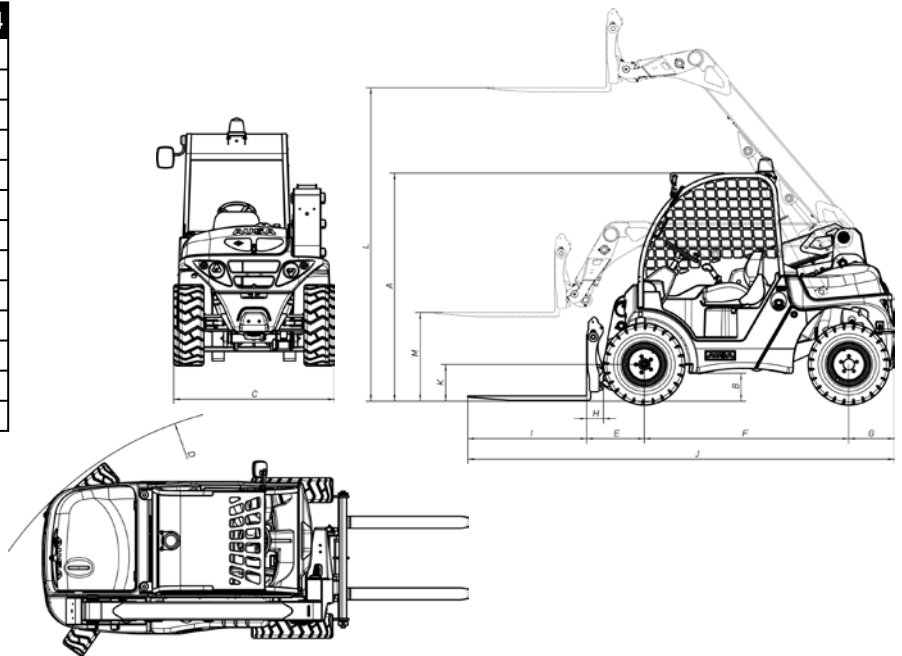

TECHNICAL SPECIFICATIONS

| | | T 133 H | T 133 H x4 |
|--------------------------------------|--|--|--------------------------|
| Load capacity | Max. load (Kg) | | 1300 |
| | Load at max. height (Kg) | | 1300 |
| Lifting height | Maximum lifting height (mm) | | 2700 |
| | Lifting height at max. load (mm) | | 2700 |
| Reach | Max reach (mm) | 411 | 390 |
| | Capacity at max reach (Kg) | | 1300 |
| Unload weight (Kg) | | 2000 | 2200 |
| Engine | Diesel | | Kubota D-1105 |
| | Power acc./DIN 70020 (rpm) | | 16.8 KW (22.4 CV) / 2700 |
| | Torque | | 71 Nm |
| | N° of cylinders | | 3 |
| | Cooling system | | Water |
| Traction | | 4x2 | 4x4 |
| Transmission | | Hidrostatic 1 gear | |
| Clutch | | NO | |
| Engine starting system | | Electric | |
| Speed (km/h) | | 20 | |
| Axles | | AUSA "NTJ" | |
| Gradient negotiable (with full load) | | 31 % | 26 % |
| Hydraulic circuit | Working pressure | 240 bar | |
| | Hydraulic pump | 8 cc | |
| | Flow circuit (l/min) | 19.5 | |
| Tyres | Front | 7.00 - 12 | 27x10 - 12 |
| | Rear | 7.00 - 12 | 27x10 - 12 |
| External turning circle (mm) | | 2919 | 2982 |
| Steering | | Hydraulic | |
| Tank capacity | Fuel (l) | 55 | |
| | Hydraulic fluid (l) | 32 | |
| Service brake | | Hydrostatic brake system | |
| Parking brake | | Mechanically applied hydraulically released inside the hydrostatic motor | |
| STANDARD EQUIPMENT | Seat belt | | |
| | Joystick with "total control" of movements | | |
| | Homologated "FOPS-ROPS" cabin | | |
| | Rotating beacon | | |
| | Rear view mirror | | |
| | Audible reverse warning | | |
| OPTIONAL EQUIPMENT | Antivandalic system | | |
| | Power take off with quick coupler | | |
| | Load guard | | |
| | Lighting equipment | | |
| | Working light | | |
| | Semi-closed cabin | | |
| | Full cabin with heating | | |
| | Side shift | | |
| | Attachment to lift the machine with a forklift | | |
| | Bucket (300 l / 400 l) | | |
| | 4 en 1 bucket | | |
| | "Pelikan" bucket | | |
| "Pelikan" forks | | | |
| Agricultural forks | | | |
| Bullet forks | | | |

AUSA reserves the right to make any changes in the specifications without prior notice.